

Debora Byrne Camden Council 5 Pancras Square London N1C 4AG

Quotation:Q13751Quotation Date :19th May 2017Reference:Mexborough

We thank you for your recent enquiry and are pleased to provide as requested the following quotation :

PBM wasteSTOR - Waste stream enclosures for 660I - 1280I bins

Key Features :

- PBM wasteSTOR is the high quality, robust modular storage system for your 4-wheeled waste and recylcing bins leaving no space for waste to be deposited outside the receptacle provided.
- Neatly styled with custom wall panel options including fire retarant finishes and highly durable 100% recycled HDPE plastic, PBM wasteSTOR enhances and protects the surrounding architectural fabric.
- Configurable for site layout, the linear compartment design of PBM wasteSTOR makes efficient use of valuable communal space in the urban enviroment.
- Helping make recycling simpler, wasteSTOR door types can be specified to enable source-segregation of waste streams with specifically sized loading apertures and prominently displayed WRAP signage in local languages to reduce opportunities for confusion.
- Access control options provide the same durability for challenging environments with ease of use from lever latch with a number of deadlocking options for warden or user specific control.
- Designed for ease of site installation, together with the added benefit of a future-proofed scheme, the PBM wasteSTOR is a bolt-down panel system that can be extended or relocated.
- All metroSTOR products are covered by Streetspace Group 5yr limited warranty and supported by our own nationwide customer care teams.



Product Specification Details

Unit Type

- PBM model accomodates standard 4-wheeled bins from 1100L-1280L (std. specification) Т1
- Т2 PBMN model accomodates 4-wheeled bins from 660L-770L
- PBMP model (accomodates 'Paladin' type chute bins) Т3
- PBMT model (accomodates 'Taylor' type bins) т4

Frame Finish

- Galvanised frame finish (std. specification) F1
- F2 Powder coated (polyester powdercoated to non-metallic RAL colour) frame finish

Cladding Type

- SW PSE green treated panel (std. specification) C1
- C2 SW PSE treated panel / Sentrin FRX Fire retardant treatment
- SW PSE treated panel / woodstain system C3
- HDPE recycled plastic panel Black colour C4
- C5 HDPE recycled plastic panel - Brown colour
- **C**6 PCGS polyester coated galvanised steel panel

Roof Assembly / Rainwater

- R1 Galvanised roof finish (std. specification)
- Powder coated roof (PPC non-metallic RAL colour) finish R2
- Wild® Greenroof System for L/M series units R3

Door Configuration

- Left-hand hinged (std. specification) D1
- **Right-hand hinged** D2

Door Type

D5

- Full height cladding / no aperture D3
- General waste aperture (std. specification) D4 2no.
 - 2no.
- Standard recycling aperture / rear chute D6 Non-bagged recycling aperture / rear chute

Door Options

- D7 Self-close spring mechanism
- D8 Internal brush strips for non-bagged recyclables
- D9 WRAP signage decals
- D10 Client logo decals
- D11 Door finish powder coated (PPC non-metallic RAL colour)

Access Control


- Lever latch / eurocylinder deadlock (std. specification) A1
- Lever latch / eurocylinder deadlock (client supplied barrel) A2
- Lever latch / mechanical keypad deadlock Α3
- Lever latch / FB2 Fire Brigade Key deadlock A4
- A5 Slide bolt / no latch

Interior

- Internal divider bars / bay (std.specification) L1
- Internal spacer bar (std.specification) 12

Installation

Galvanised steel base plates with resin-anchor ground fixings for concrete foundation pads S1





Quotation:

			Total
PBM-4 wasteSTOR to above specification	2no.	£4,522.50	£9,045.00
	1.00	6240.00	6240.00
Delivery Charge	1no.	£249.00	£249.00
Unit Installation (includes unit set up/ levelling and bolt down).	1no.	£1,070.00	£1,070.00
Assumes suitable surface for fixing			
Quotation total inclusive of delivery, installation and warranty		_	£10,364.00 ex. VAT
Provisional Items (extra over costs not included in quotation total):			
Foundations	Item		By Others


Notes to Quotation :

- 1) We recommend that new concrete bases are installed 15mm above surrounding surface level to avoid potential issues with surrounding water levels.
- 2) Where foundation pads are required these must finish flush with existing surface levels.
- 3) Where surrounding surfaces fall towards storage unit, additional drainage may be required to avoid water ingress.
- 4) Footprint area for the new unit should not exceed 70mm height difference from end to end.
- 5) Door opening area levels must not exceed 15mm above the base level
- 6) Ramped access maybe required if adjacent surfaces are sloping

metroSTOR™ is part of the Streetspace Group. Please note prices are exclusive of VAT and are valid for 90 days from quotation date. Any order would be subject to Streetspace Group's standard Terms and Conditions of sale which are available on request. A deposit payment may be payable with order - details to be confirmed with sales team.



Date :	08 September 2017
Quotation Ref :	13751
Project Contact :	Debora Byrne

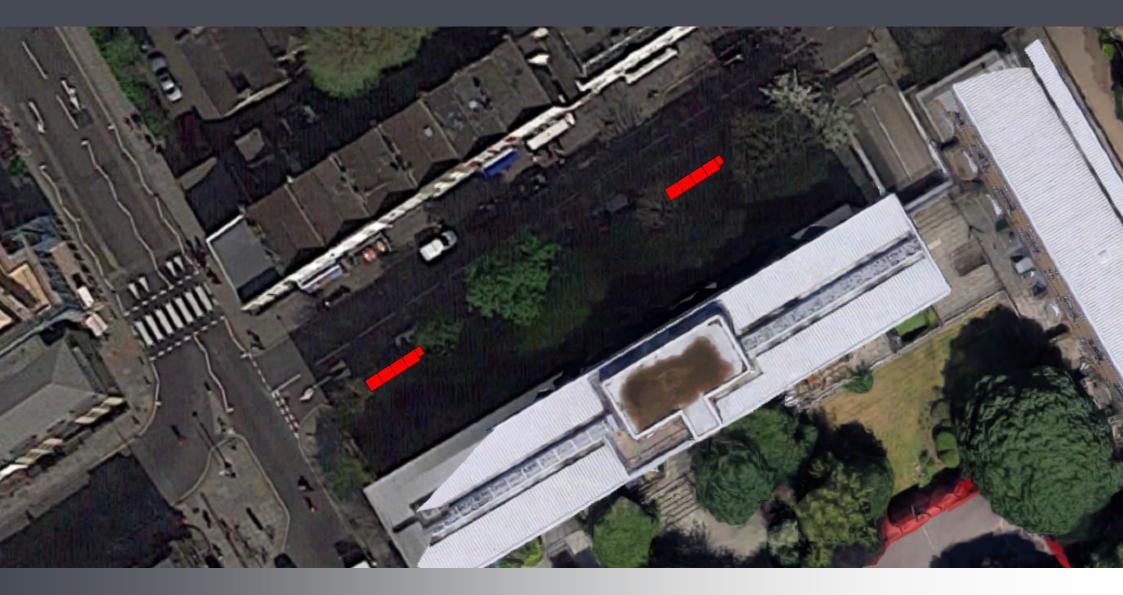



Page 1 of 1 metroSTOR Views



Date :	22 May 2017
Quotation Ref :	13751
Project Contact :	Debora Byrne






Page 1 of 2 metroSTOR Views





Date :	22 May 2017
Quotation Ref :	13751
Project Contact :	Debora Byrne

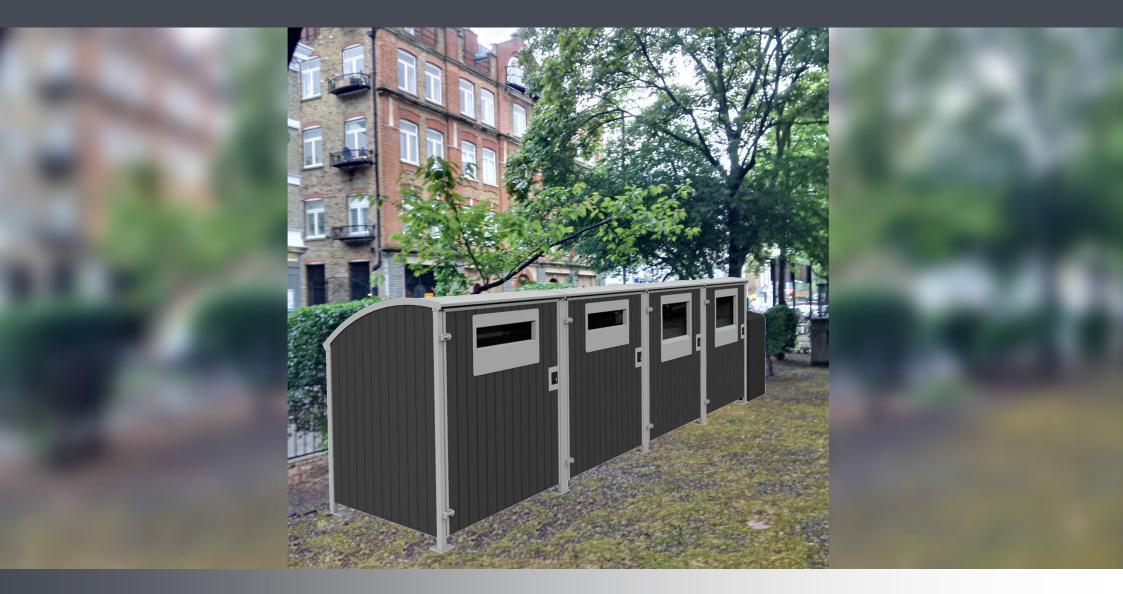




Page 2 of 2 metroSTOR Views

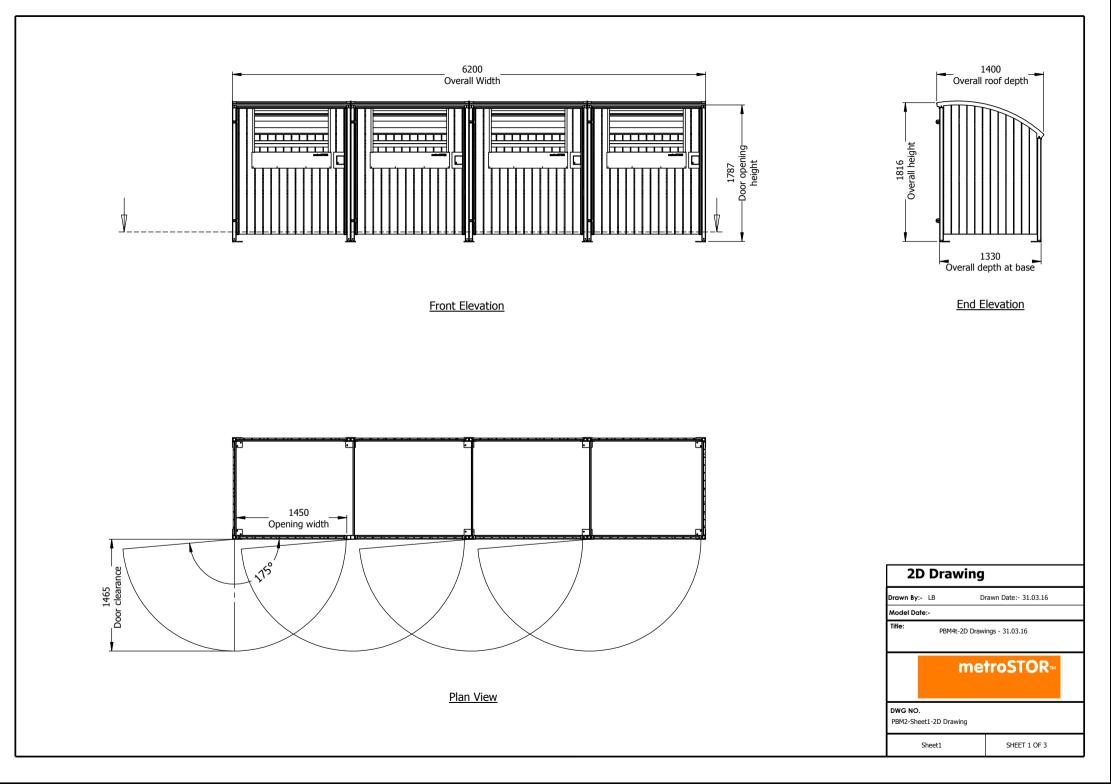

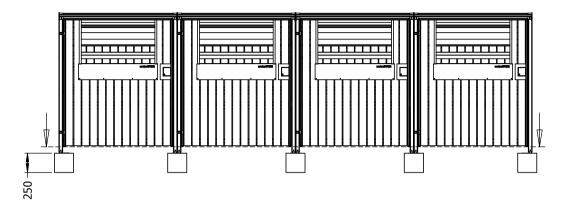



End Elevation

Front Elevation

